



EDGE LIT - DIRECT DC

Square Light

COMMERCIAL APPLICATION

Maximum brightness, unrivaled efficiency.

Thin, low-profile, edge lit square, lightweight design, remarkably even light distribution, consumes 65% to 90% less energy than incandescent-based products.

Offering illumination performance unavailable from other manufacturers: **150 Lumens per watt, CRI 97, 100,000 hour life (L70).**

ETL Listed. RoHS compliant. 99% recyclable, no IR or UV radiation. EM/RF interference free.

Available in:

- 3,500K
- 4,200K

Offered in 4", 6", and 8" sizes.

Connects to the **Lumicat Digital Light Module** using Cat-5 cable or hard wire, providing the simplest, most cost-effective installation available.

- Thin profile - less than .6"
- Standard recessed fit for common ceiling tile
- Class 2 Power, **no conduit needed**
- Multiple fixtures can be daisy-chained




THE FUTURE OF LIGHTING



EDGE LIT - DIRECT DC

Square Light

DIMENSIONS

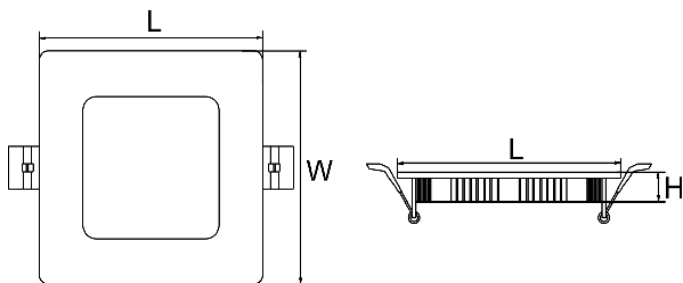

	4"	6"	8"
Aperture:	76mm	129mm	175mm
Ceiling opening:	105mm	160mm	200mm
Overlap trim:	44mm	44mm	44mm
Height:	15mm	15mm	15mm

SLEL-4-__

SLEL-6-__

Color Temperature:

4 = 3500K

5 = 4200K

SPECIFICATIONS	
Input Voltage	48VDC
Cut Out Hole Size	5-1/4" (134mm) diameter
Dimming	0-100%
Power Consumption	4" = 9W / 6" = 15W
Luminous Flux	4" = 810 Lumens / 6" = 1225 Lumens
Beam Angle	120 Degrees
Housing Color	White
Fixture Material	Die Cast Aluminum Housing
Operating Temperature	-4 degrees F (-20 C) to +122 degrees F (+50 C)
Weight	1.0 lbs
Expected Lifespan	100,000 hours (LM70)
Warranty	5 years
IC Rated	Not Applicable
Standards/Certifications	Made in USA, UL Listed, ETL Listed, RoHS, CE

LED LIGHT COLOR:



Warm White



Neutral White

FEATURES:

- No UV or IR radiation
- Easy to install - **Fixtures can be daisy-chained**
- Maintenance free. No LED driver failures to replace
- Suitable for indoor temperatures from -4 to +122 degrees F (-20 to +50 C)
- Solid-state construction shock and vibration resistant
- LEDs are super bright, high intensity and low power consumption
- Extremely long life: up to 100,000 hours (LM70)
- No EM/RF interference
- Recyclable at end of life

CERTIFICATIONS:

