



DIRECT DC

Gimbal Light

COMMERCIAL APPLICATION

Maximum brightness, unrivaled efficiency.

Optum's adjustable gimbal fixture can be aimed downward on sloped ceilings or directed onto any area you wish to highlight. 35 degree vertical tilting, 355 degree bidirectional rotation.

Offering illumination performance unavailable from other manufacturers: **150 Lumens per watt, CRI 97, 100,000 hour life (L70).**

ETL Listed. RoHS compliant. 99% recyclable, no IR or UV radiation. EM/RF interference free.

Available in:

- 3,000K
- 3,500K
- 4,200K
- 5,000K
- **Tunable-White (3,000K - 6,000K)**
(Tunable range can be specified - contact Factory)

Offered in 3" & 4" sizes.

Connects to the **Lumicat Digital Light Module** using Cat-5 cable or hard wire, providing the simplest, most cost-effective installation available.

- Standard recessed fit for common ceiling tile
- Class 2 Power, **no conduit needed**
- Multiple fixtures can be daisy-chained




THE FUTURE OF LIGHTING



DIRECT DC

Gimbal Light

DIMENSIONS

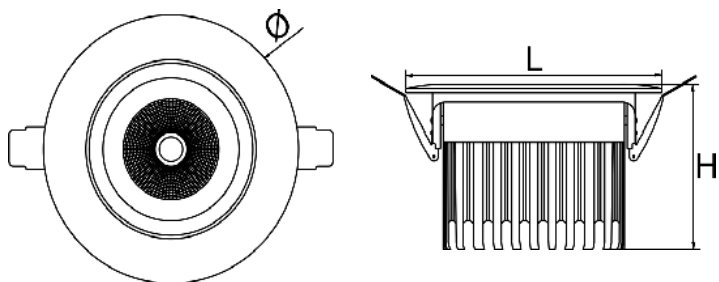

	3"	4"
Aperture:	90mm	120mm
Ceiling opening:	80mm	108mm
Overlap trim:	45mm	45mm
Height:	60mm	74mm

SLEL-4-__

SLEL-6-__

Color Temperature:

4 = 3500K

5 = 4200K

SPECIFICATIONS	
Input Voltage	48VDC
Cut Out Hole Size	5-1/4" (134mm) diameter
Dimming	0-100%
Power Consumption	4" = 9W / 6" = 15W
Luminous Flux	4" = 810 Lumens / 6" = 1225 Lumens
Beam Angle	120 Degrees
Housing Color	White
Fixture Material	Die Cast Aluminum Housing
Operating Temperature	-4 degrees F (-20 C) to +122 degrees F (+50 C)
Weight	1.0 lbs
Expected Lifespan	100,000 hours (LM70)
Warranty	10 years
IC Rated	Not Applicable
Standards/Certifications	Made in USA, UL Listed, ETL Listed, RoHS, CE

LED LIGHT COLOR:



Warm White



Neutral White

FEATURES:

- No UV or IR radiation, No EM/RF interference
- Easy to install - **Fixtures can be daisy-chained**
- Maintenance free. No LED driver failures to replace
- Suitable for indoor/outdoor temperatures from -4 to +122 degrees F (-20 to +50 C)
- Solid-state construction shock and vibration resistant
- LEDs are super bright, high intensity and low power consumption
- Extremely long life: up to 100,000 hours (LM70)
- **IC Rating not applicable due to 48VDC inherently safe per NEC**
- Recyclable at end of life

CERTIFICATIONS:

